

# CASE STUDY



## PRESERVATION OF THE WATER STEAM CYCLE AT THE STATKRAFT CCPP

### CUSTOMER

Statkraft Markets, Hürth Germany




### PLANT CHARACTERISTICS

- two combined cycle power plants
- total power output: 800 MW
  - 2 x gas turbines each 267 MW
  - 1 x steam turbine 270 MW
- steam capacity: 700 t/h
- 2 x heat recovery steam generator
  - HP: 114 bar, 555°C, 500 t/ h
  - IP: 28 bar, 545°C, 117 t/ h
  - LP: 4,2 bar, 230°C, 72 t/ h
- no condensate polisher
- Application: flexible plant operation, less operation, fast start-up required



### SITUATION

Because of low electricity rates and high prices on gas at the same time, both units had only few operating hours and faced frequent and unpredictable offline periods. To protect the boilers against offline corrosion, they remain filled and get nitrogen blanketing. The turbine and condenser were dried by air. Even with these already applied preservation actions the plant faces offline corrosion issues, increased iron levels and clogging of condensate filters during start-up. Since January 2015 the preservation technology with the film forming amine ODAICON® was additionally used.

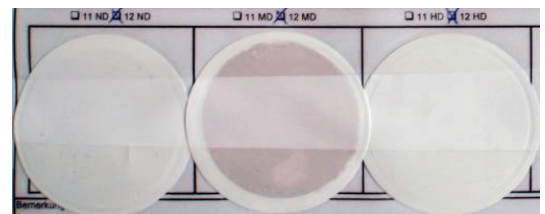

Parameters	Formula	Unit	LP	IP	HP
Iron <sub>Total</sub>	Fe	µg/l	<20	<80	<20
Iron <sub>AAS</sub>	Fe <sup>2+</sup> /Fe <sup>3+</sup>	µg/l	3	29	3

# CASE STUDY



## PRESERVATION OF THE WATER STEAM CYCLE AT THE STATKRAFT CCPP


### PRESERVATION PROCEDURE

- GENERAL REQUIREMENTS
  - commissioning anytime at short call
  - preservation in single steps
  - cycling operation with daily start and stop
- DOSING TECHNOLOGY
  - ODACON® injection in main condensate after condensate pump
  - use of a metering pump with max. 24 l/h
  - installation of an injection lance referred to recommendation of REICON
- SUPERVISION PROGRAMME
  - on-line monitoring of pH-value, conductivity after cation exchanger (CACE) and degased conductivity (DC)
  - periodic measurement of ODACON® concentration in condensate



### RESULTS

- Re-commissioning time was reduced about 50 %
- Iron concentration during re-start in IP section reduced by 70 %
- no additional nitrogen injection for short term protection and drying for long term protection necessary

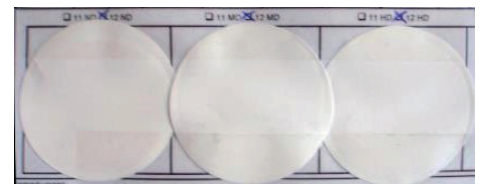

### BENEFITS



REDUCED IRON  
CONCENTRATION



FASTER  
START UP



PROTECTIVE  
LAYER FORMATION



+49 341 649 120



info@reicon.de



reicon.de